


Interior Living - Furniture Films



skai® PureLux PET-2D-uni/solid Product Construction

- > **Base film**
as a color defining substrate
- > **Lacquer**
UV-lacquered surface for gloss level,
function & haptics
- > **Primer**
for adhesion (optional)
- > **Thickness**
0,25mm
- > **Width**
1280mm (standard, other widths
on demand)
- > **More**
Laminated with protective film

Product design of single-layer film

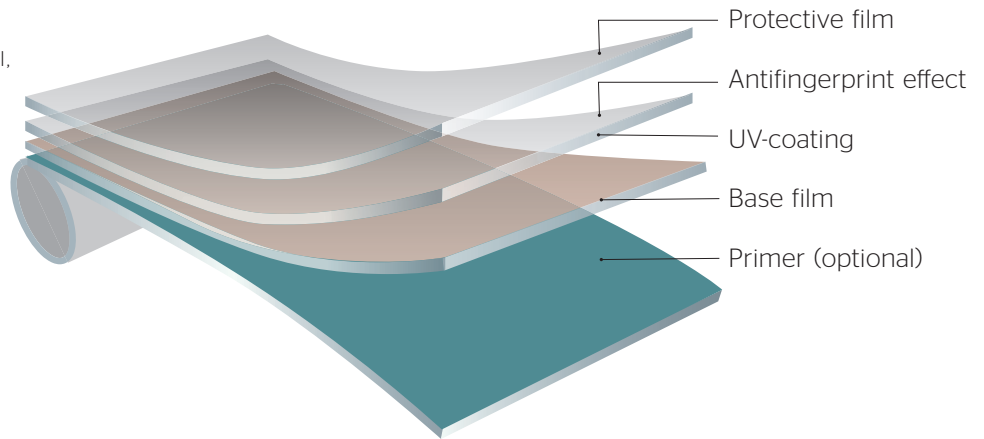

skai® PureLux Characteristics



Smooth surface and
soft to the touch



Superior scratch
resistance



Easy to clean



Processability



Light fastness ≥ 6



Chemical
resistance 1B



Certified quality



Formable



Use of recycled
raw material



Excellent
anti-fingerprint
properties



High
disinfectant
resistance



Flat lamination,
postformig